
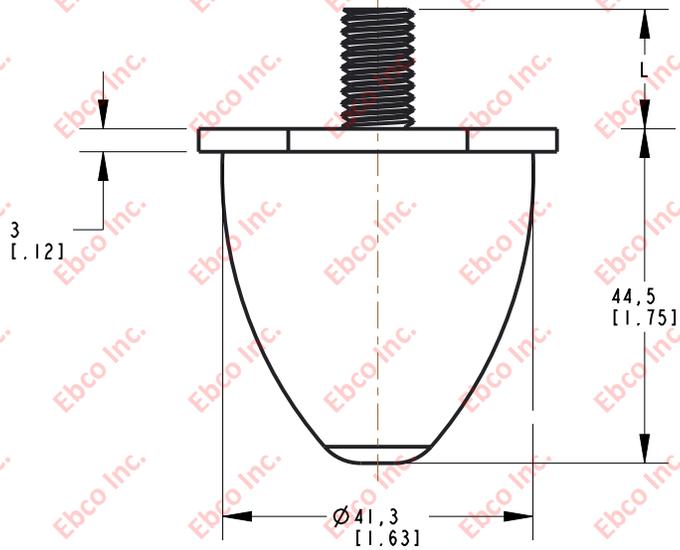


1050

DWG. NO.

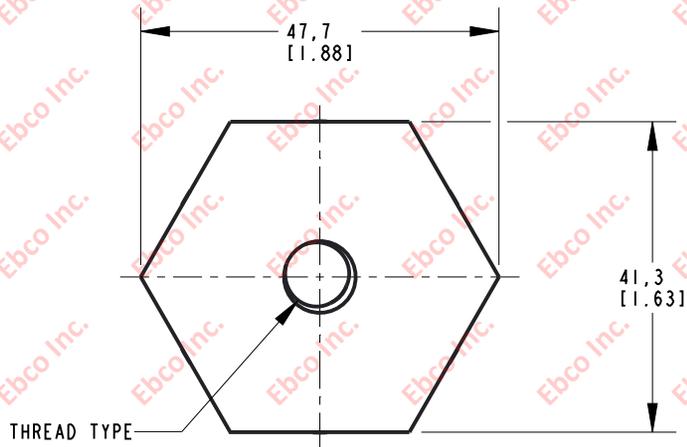

HARDWARE SPECIFICATIONS

PART NO.	THREAD TYPE	L
1050-XX-F2	5/16-18	9,5 [.375]
1050-XX-F5	5/16-18	15,9 [.625]
1050-XX-FS	5/16-18	30,0 [1.18]
1050-XX-15	3/8-24	15,9 [.625]
1050-XX-Q5	M10X1.5	15,9 [.625]

AXIAL COMPRESSION SPECIFICATIONS

PART NUMBER		MAX. RECOMMENDED STATIC LOAD		REFERENCE STIFFNESS	
NATURAL RUBBER	NEOPRENE	lb	N	lb/in	N/mm
1050-71-XX	1050-81-XX	30	133	91	16
1050-73-XX	1050-83-XX	65	289	200	35
1050-74-XX	1050-84-XX	75	334	230	40
1050-75-XX	1050-85-XX	90	400	275	48
1050-77-XX	1050-87-XX	140	623	424	74



TITLE: 1050	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EBCO ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EBCO IS PROHIBITED.	
TOLERANCES PER RMA STANDARD A3	REV. D
DATE: 06-14-21	UNITS: mm [INCH]

1330 HOLMES RD. ELGIN, IL 60123

SPECIFICATIONS SUBJECT TO CHANGE