



2109

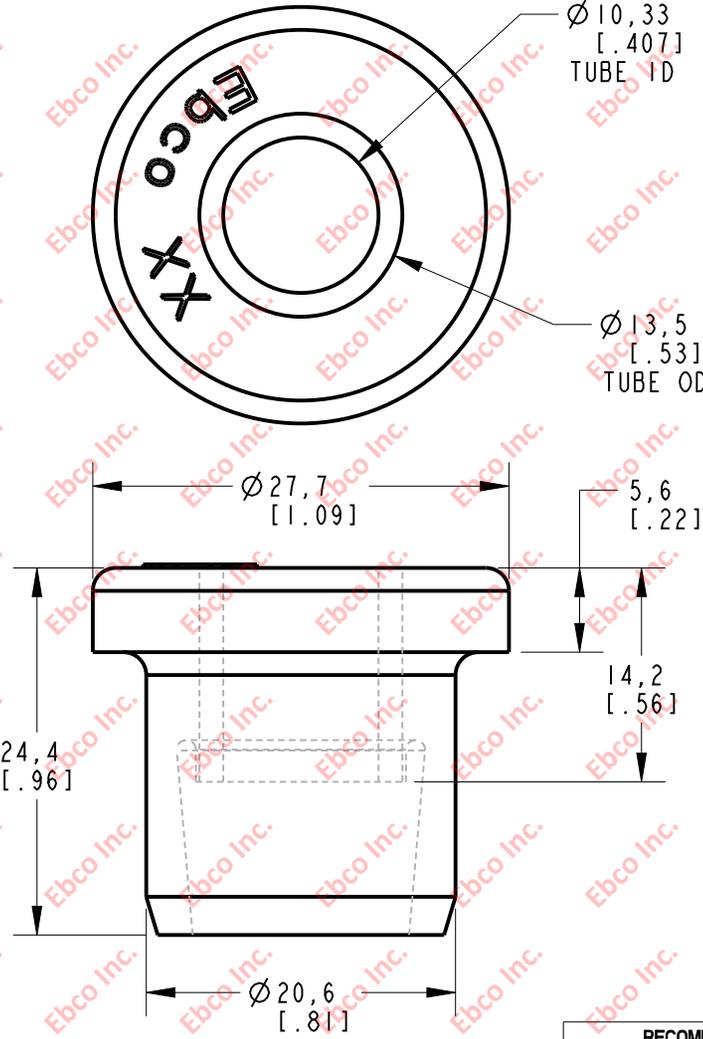

INSTALLATION VIEW (Shown under no load)

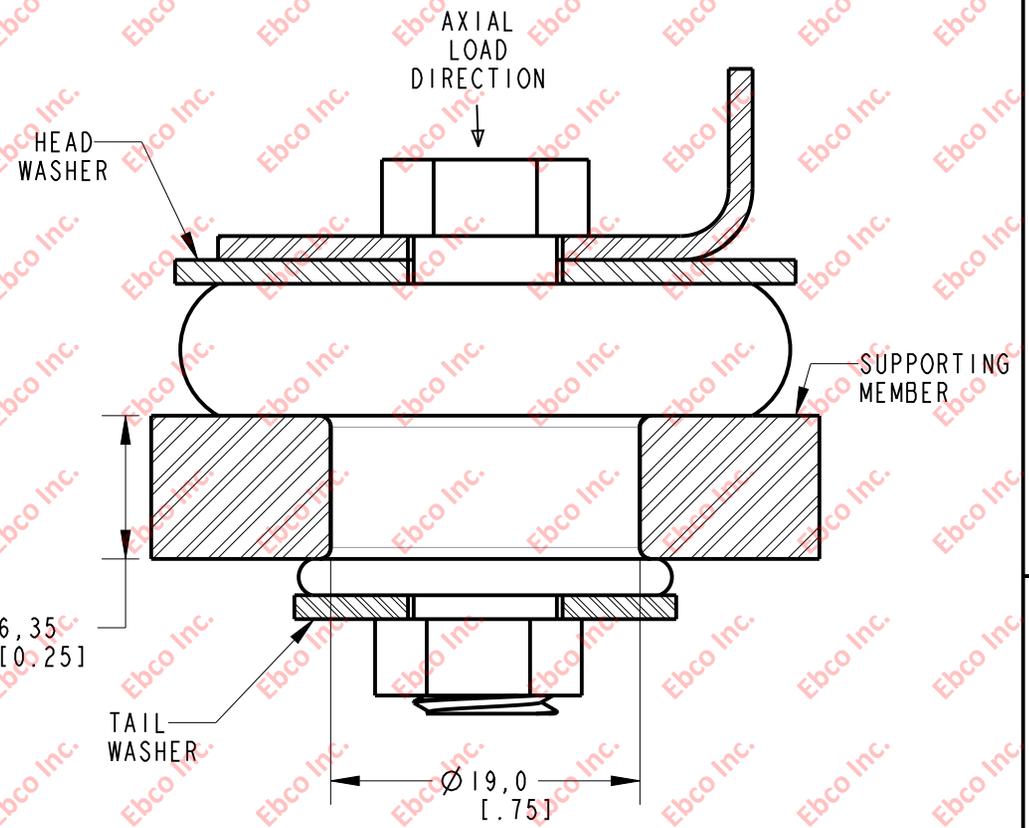

INSTALLATION DIMENSIONS

SPECIFICATIONS

PART NUMBER		MAX AXIAL DEFLECTION		MAX AXIAL LOAD	
NATURAL RUBBER	NEOPRENE	Inch	mm	lb	N
2109-72	2109-82	.025	.635	4800	841
2109-73	2109-83			5200	910
2109-74	2109-84			7200	1261

RECOMMENDED BOLT INFORMATION				TIGHTENING TORQUE			
ENGLISH		METRIC		CLAMP LOAD		TIGHTENING TORQUE	
SIZE	GRADE	SIZE	CLASS	lb	N	ft-lb	N-m
3/8	2	M10	5.8	3197	16500	20.0	33.1

WASHER SPECIFICATIONS						
TYPE	O. D.		I. D.		THICKNESS	
	in	mm	in	mm	in	mm
HEAD	1.25	31.75	.40	10.16	.125	3.18
TAIL	1.25	31.75				

TITLE: 2109

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EBCO AND REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EBCO IS PROHIBITED.

TOLERANCES PER RMA STANDARD A3

REV. A

DATE: 08-06-25

UNITS: mm [INCH]

1330 HOLMES RD. ELGIN, IL 60123

SPECIFICATIONS SUBJECT TO CHANGE