

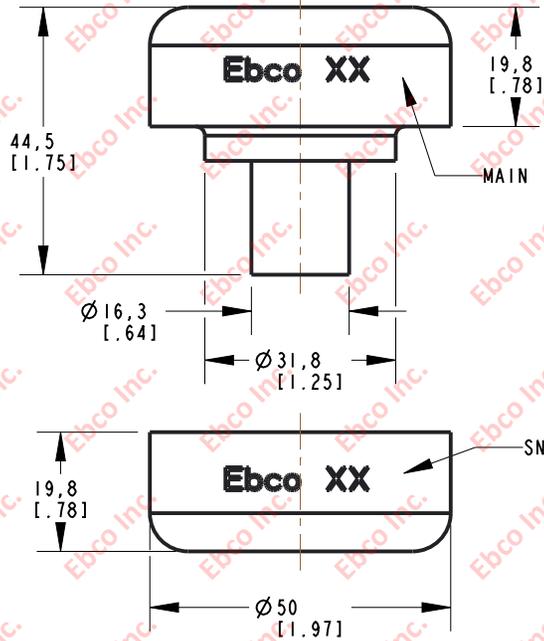


2335

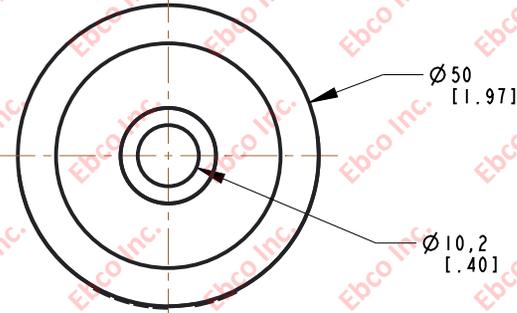

INSTALLATION VIEW (Shown under no load)

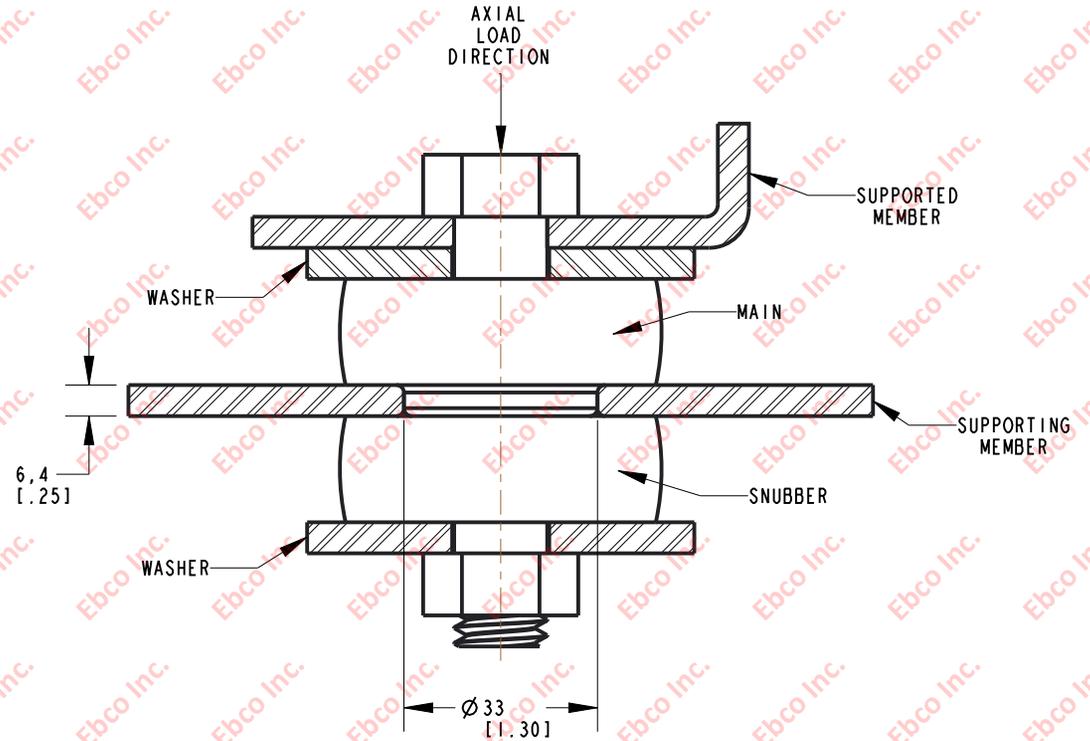

SPECIFICATIONS

PART NUMBER		MAX. AXIAL DEFLECTION		MAX. AXIAL LOAD	
NATURAL RUBBER	NEOPRENE	in	mm	lb	N
2335-71	2335-81	.07	1.78	80	356
2335-72	2335-82			100	445
2335-73	2335-83			130	579
2335-74	2335-84			170	757
2335-75	2335-85			210	935
2335-76	2335-86			250	1112
2335-77	2335-87			350	1558
2335-710	2335-810			850	3780

INSTALLATION DIMENSIONS

RECOMMENDED BOLT INFORMATION				TIGHTENING TORQUE			
ENGLISH		METRIC		CLAMP LOAD		TIGHTENING TORQUE	
SIZE	GRADE	SIZE	CLASS	lb	N	ft-lb	N-m
3/8	5	M10	9.8	4941	21979	30.9	41.72
WASHER SPECIFICATIONS							
O.D.		I.D.		THICKNESS			
in	mm	in	mm	in	mm		
2.22	56.39	.40	10.16	.134	3.40		



TITLE: 2335		DATE: 06-09-21	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EBCU. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EBCU IS PROHIBITED.			
TOLERANCES PER RMA STANDARD A3	REV. C	UNITS mm [INCH]	
1330 HOLMES RD. ELGIN, IL 60123			
SPECIFICATIONS SUBJECT TO CHANGE			