

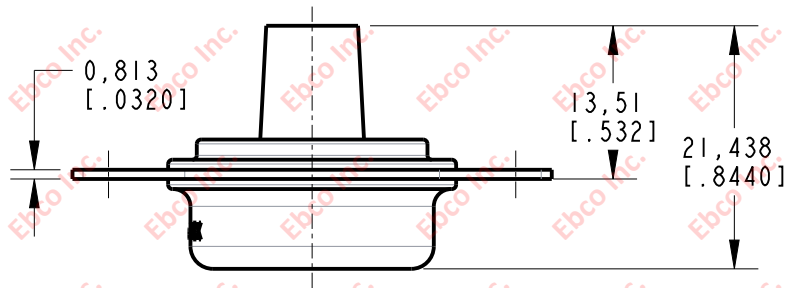


4720

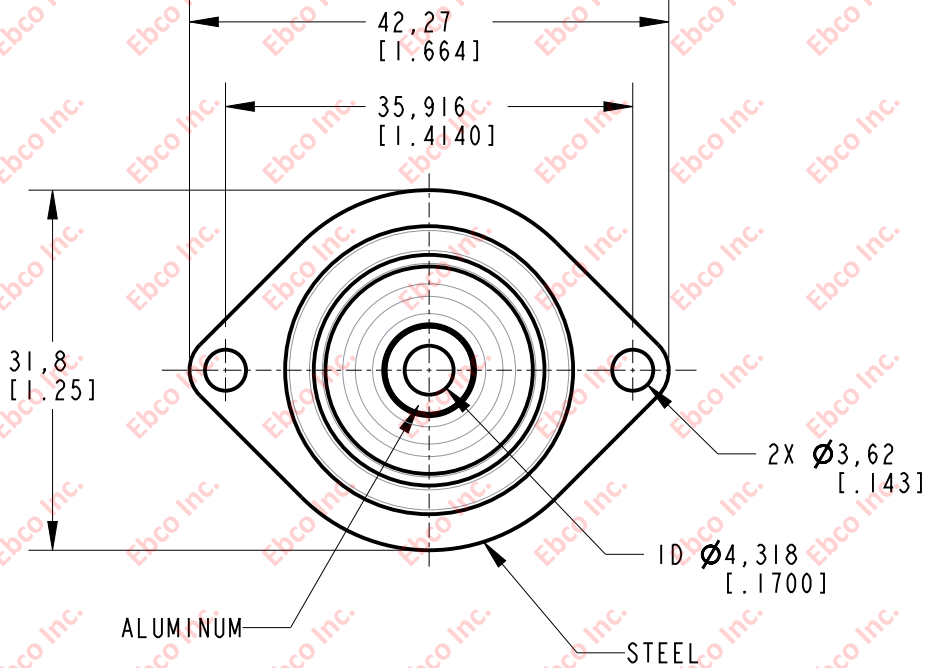

INSTALLATION VIEW (Shown under no load)

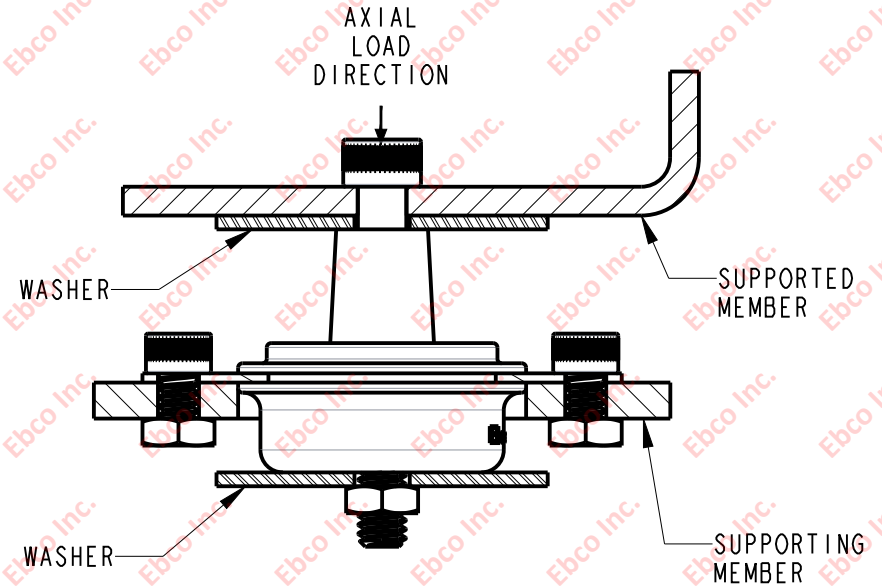

PART NUMBER

MAX AXIAL
DEFLECTIONMAX AXIAL
LOAD

NATURAL RUBBER	NEOPRENE	Inch	mm	lb	N
4720-700	4720-800	4.76	[0.188]	XX	XX
4720-70	4720-80			XX	XX
4720-71	4720-81			XX	XX
4720-74	4720-84			30	7
4720-75	4720-85			40	9
4720-76	4720-86			41	9

RECOMMENDED BOLT
INFORMATION

TIGHTENING TORQUE

ENGLISH		METRIC		CLAMP LOAD		TIGHTENING TORQUE	
SIZE	GRADE	SIZE	CLASS	lb	N	ft-lb	N-m
8-32	5	M4	9.8	900	4000	2.5	3.4
WASHER SPECIFICATIONS							
O.D.		I.D.		THICKNESS			
in	mm	in	mm	in	mm		
0.75	19.05	0.188	4.78	0.125	3.18		



TITLE: 4720

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EBSCO ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EBSCO IS PROHIBITED.

TOLERANCES
PER RMA
STANDARD
A3

REV. 0.2

DATE: 07-10-25
UNITS: mm [INCH]

1330 HOLMES RD. ELGIN, IL 60123

SPECIFICATIONS SUBJECT TO CHANGE