

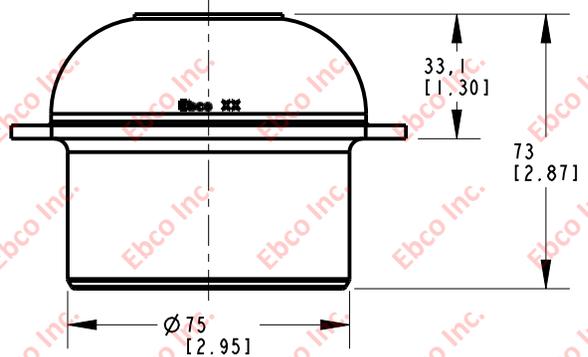


4821

DWG. NO.

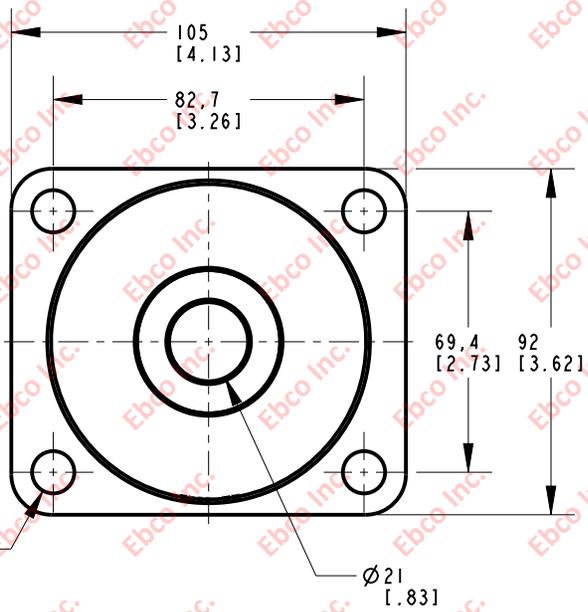

INSTALLATION VIEW (Shown under no load)

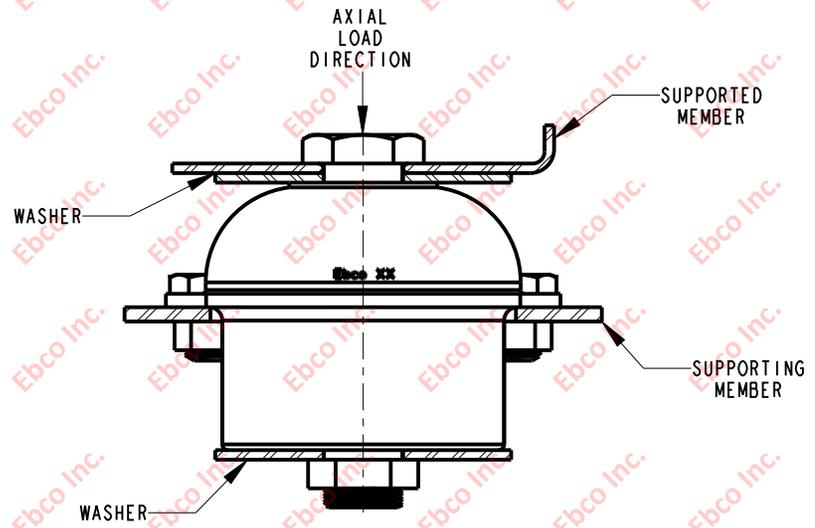

INSTALLATION DIMENSIONS

RECOMMENDED BOLT INFORMATION				TIGHTENING TORQUE			
ENGLISH		METRIC		CLAMP LOAD		TIGHTENING TORQUE	
SIZE	GRADE	SIZE	CLASS	lb	N	ft-lb	N-m
3/4	5	M18	9.8	21300	94747	266	361

WASHER SPECIFICATIONS					
O.D.		I.D.		THICKNESS	
in	mm	in	mm	in	mm
3	76.2	0.83	21.082	.15	3.048

SPECIFICATIONS

PART NUMBER		MAX. AXIAL DEFLECTION		MAX. AXIAL LOAD		TANGENTIAL STIFFNESS	
NATURAL RUBBER	NEOPRENE	in	mm	lb	N	lb/in	N/mm
4821-75	4821-85	.20	5.08	825	3670	3438	602
4821-76	4821-86			1000	4448	4167	730
4821-77	4821-87			1325	5894	5521	967

*LOAD/DEFLECTION AS ASSEMBLED, SEE INSTALLATION VIEW



TITLE: 4821
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EBCO AND REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EBCO IS PROHIBITED.
 TOLERANCES PER RMA STANDARD A3
 REV. A
 DATE: 02-08-24
 UNITS: mm [INCH]
 1330 HOLMES RD. ELGIN, IL 60123

SPECIFICATIONS SUBJECT TO CHANGE